


Size(mm)		Weight	IP
dia	length	(g)	
50	67	67g	30

Size(mm)		Weight	IP
dia	length	(g)	
50	67	65g	30

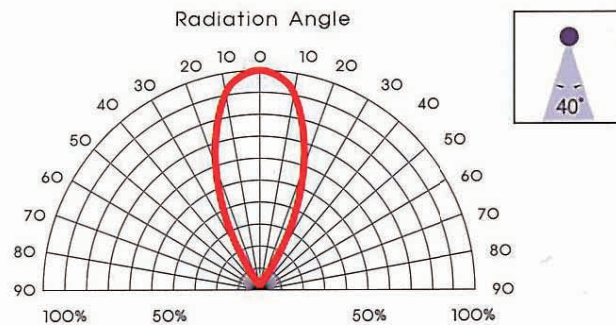

Model	Color Temp.	Base	Rated Input Voltage	Power Consumption	Total Lumen Flux	Beam Angle	Illuminance	CRI
			(V)	(W)	(lm)	(°)	(lux-1m)	
1604J-WW40	3000° K	E11	AC100V	4W	190	40°	320Lux	70
1604J-CW40	6500° K	E11	AC100V	4W	240	40°	390Lux	70
1604J2-WW40	3000° K	E11	AC100V	4W	190	40°	320Lux	70
1604J2-CW40	6500° K	E11	AC100V	4W	240	40°	390Lux	70

HIGH CRI LAMP (Order Made)

Model	Color Temp.	Base	Rated Input Voltage	Power Consumption	Total Lumen Flux	Beam Angle	Illuminance	CRI
			(V)	(W)	(lm)	(°)	(lux-1m)	
1604JH-WW40	3000° K	E11	AC100V	4W	145	40°	255Lux	90
1604JH-CW40	6500° K	E11	AC100V	4W	180	40°	310Lux	90
1604J2H-WW40	3000° K	E11	AC100V	4W	145	40°	255Lux	90
1604J2H-CW40	6500° K	E11	AC100V	4W	180	40°	310Lux	90

- Operating Temperature : -20°C ~ 40°C
- HOUSING : ALUMINIUM