
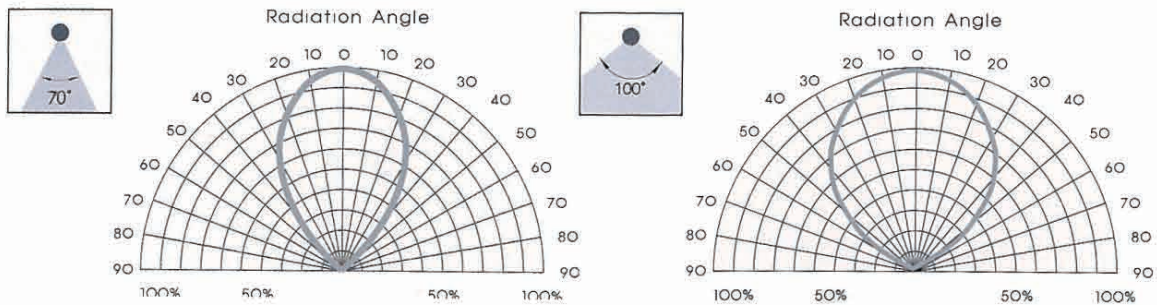


Size (mm)		Weight
dia	length	(g)
125	117	490g

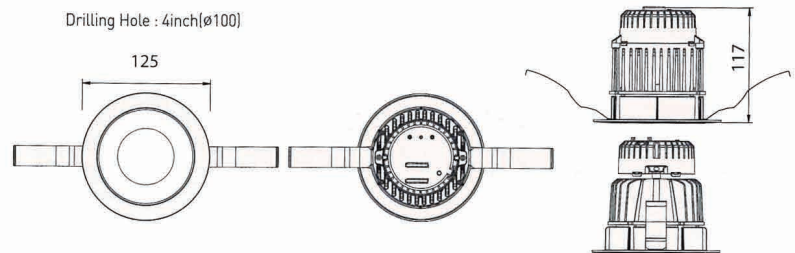

Model	ColorTemp	Rated Input Voltage	Power Consumption	Total Lumen Flux	Beam Angle	Illuminance	CRI
		(V)	(W)				
DLL - 14PD - 4WL	3000° K	AC110V/220V	10W	630	70°	502Lux	70
DLL - 14PD - 4WB	3000° K	AC110V/220V	10W	630	100°	229Lux	70
DLL - 14PD - 4CL	5700° K	AC110V/220V	10W	690	70°	528Lux	70
DLL - 14PD - 4CB	5700° K	AC110V/220V	10W	690	100°	242Lux	70

HIGH CRI LAMP (Order Made)

Model	ColorTemp	Rated Input Voltage	Power Consumption	Total Lumen Flux	Beam Angle	Illuminance	CRI
		(V)	(W)				
DLL - 14PDH - 4WL	3000° K	AC110V/220V	10W	470	70°	380Lux	90
DLL - 14PDH - 4WB	3000° K	AC110V/220V	10W	470	100°	170Lux	90
DLL - 14PDH - 4CL	5700° K	AC110V/220V	10W	520	70°	374Lux	90
DLL - 14PDH - 4CB	5700° K	AC110V/220V	10W	520	100°	172Lux	90

• Operating Temperature : -20°C~40°C

• HOUSING : ALUMINIUM